



Herts Glass Windows and Doors Ltd proudly excels in producing cost-effective, creative, and innovative glazing and security solutions. Our exceptional team wholeheartedly embraces the essence of delivering impeccable customer care coupled with top-notch craftsmanship.

Our services cater to both the commercial and domestic sectors, extending our expertise to homeowners, architects, builders, and consultants, enabling them to manifest their visionary concepts throughout the picturesque landscapes of Hertfordshire and its neighbouring areas.

Embracing an extensive array of glazing and security solutions, we offer a plethora of options such as the exquisite Bi-Folds, the finest UPVC products, the regal Aluminium Front Doors, the indispensable Fire Exit Doors, the heavenly Skylights & Lanterns, the robust GRP and solid core Composite Doors, the dependable Steel Security Doors, and an extensive range of additional services and products.

Herts Glass
Windows and Doors Ltd

Office: 01923 624 660
Email: info@hertsglass.co.uk
Web: hertsglass.co.uk

  @hertsglass

Unit S1 Ashley House
Vale Industrial Estate
Tolpits Lane
WD18 9QP

Enjoy the sky above with this spectacular frameless rooflight with full thermal break for exceptional performance and stunning aesthetics.

Herts Glass
Windows and Doors Ltd

TRANSFORM
YOUR HOME
WITH
HERTS GLASS




INFINILIGHT
FRAMELESS FLAT ROOFLIGHT



THE SPECTACULAR NEW
FRAMELESS ROOFLIGHT
WITH FULL THERMAL BREAK

Enjoy the sky above without obstruction.
InfiniLIGHT lets natural light flood in with no frame to block your view, whilst the latest thermal technology helps to create unprecedented insulation levels.

- Fully Thermally-Broken Profile
- Frameless Internal finish
- Flush-Glazed External Finish
- Walk-On Glazing Option
- Motorised Electronic Opener Option
- Designed For Rapid Installation

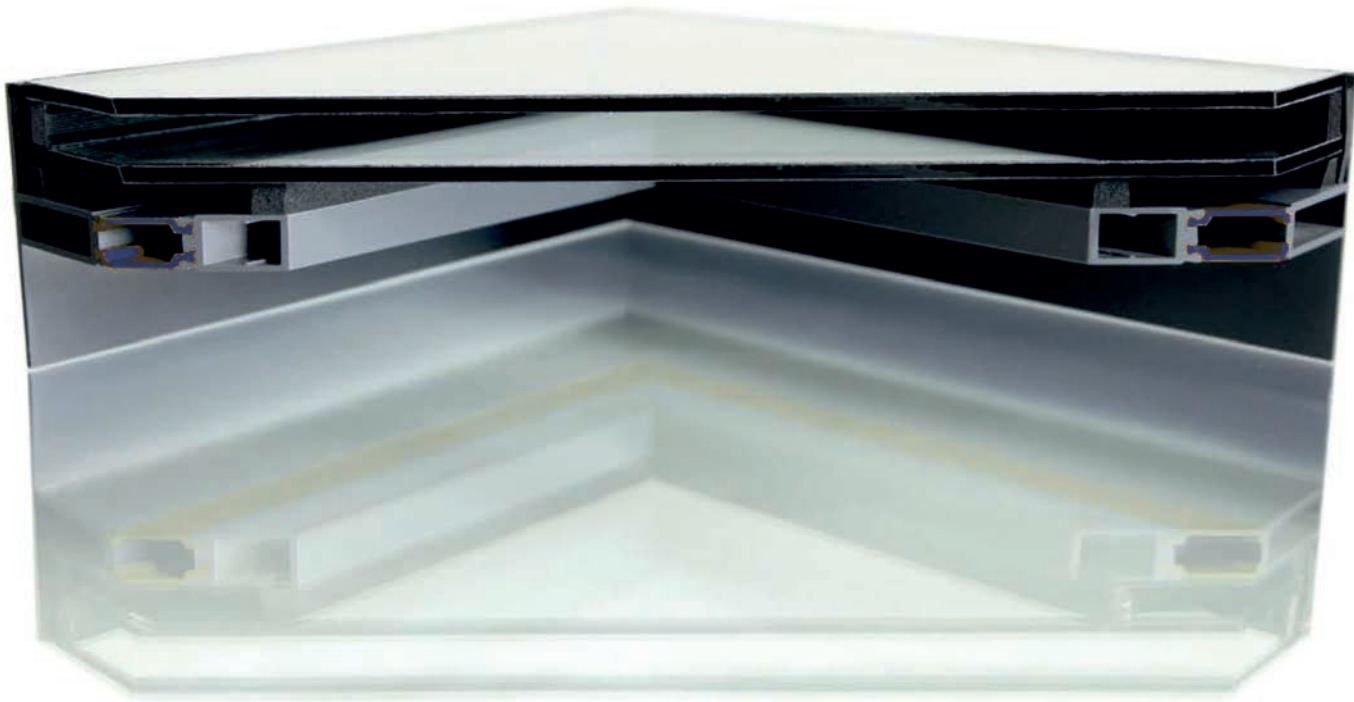

**Size
Limits**

Maximum Length	3000mm (Larger Available on Request)
Maximum Width	2000mm (Larger Available on Request)
Maximum Weight	1000 kg

PROFILE HEIGHT	102 mm
GLAZING THICKNESS	24mm-60mm
GLAZING METHOD	Structurally bonded
MINIMUM FALL	5 Degrees
MAXIMUM FALL	25 Degrees

PERFORMANCE	
U-VALUE	From 1.0 W/m²K
AIR PERMEABILITY	Class 4
WATER TIGHTNESS	Class 9A
WIND RESISTANCE	Class A4